


RETE/MESH
RHYTHM

CATEGORIA T
CATEGORY T

Gabriel®

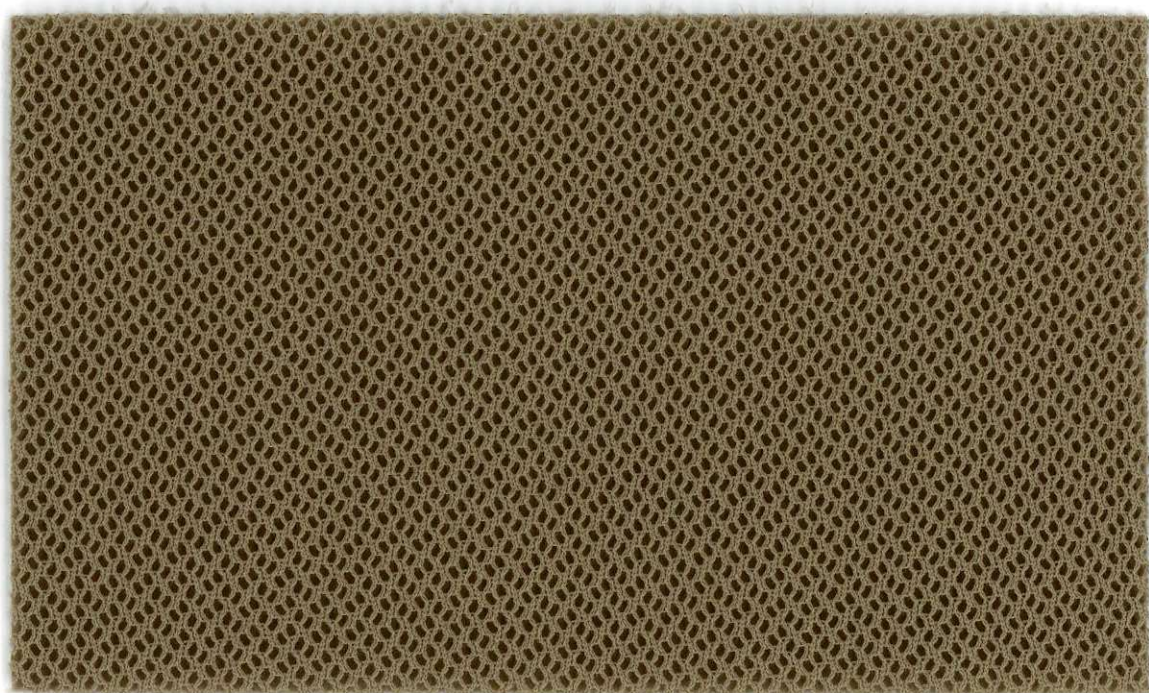

TTO



TAN




TAZ



TBI



TBL



TGR



TNE



TRO



TVD

RHYTHM

IT

Composizione
100% poliestere

Peso
525 g/lm — 16.93 oz/lin.yd

Altezza
160 cm — 63 inches

PERFORMANCE

Abrasione
70,000 — cicli martindale (EN ISO 12947-2)
100,000 — cicli (ASTM D4157)

Pilling
5 — scale 1-5, max. 5 (EN ISO 12945-2)

Resistenza alla luce
5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Resistenza allo sfregamento
4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

INFIAMMABILITÀ

Certificati
BS EN 1021-1 Sigarette
BS EN 1021 1&2 Sigarette e fiammiferi
BS 5852 Crib 5
BS 7176
DIN 4102 - B1
NF P 92-503 M3
Classe Uno UNI 8456 - UNI 9174
CA TB 117-2013

US ACT

Pass
AATCC 8 or 116 bagnato/umido
CA TB 117-2013
ASTM D4157-07 abrasione 100k
ASTM D3511 Pilling
AATCC 16 Resistenza alla luce

EN

Composition
100% polyester

Weight
525 g/lm — 16.93 oz/lin.yd

Width
160 cm — 63 inches

PERFORMANCE

Abrasion
70,000 — rubs martindale (EN ISO 12947-2)
100,000 — double rubs wyzenbeek (ASTM D4157)
(heavy duty upholstery)

Pilling
5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness
5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet
4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

FLAMMABILITY

Certificates
BS EN 1021-1 Cigarette
BS EN 1021 1&2 Cigarette and Match
BS 5852 Crib 5
BS 7176 Medium hazard
DIN 4102 - B1
NF P 92-503 M3
Class Uno UNI 8456 - UNI 9174
CA TB 117-2013

US ACT

Pass
AATCC 8 or 116 Dry/wet crocking
CA TB 117-2013
ASTM D4157-07 Wyz abrasion (heavy duty) 100k
ASTM D3511 Pilling
AATCC 16 Light fastness