




SM15



SM01

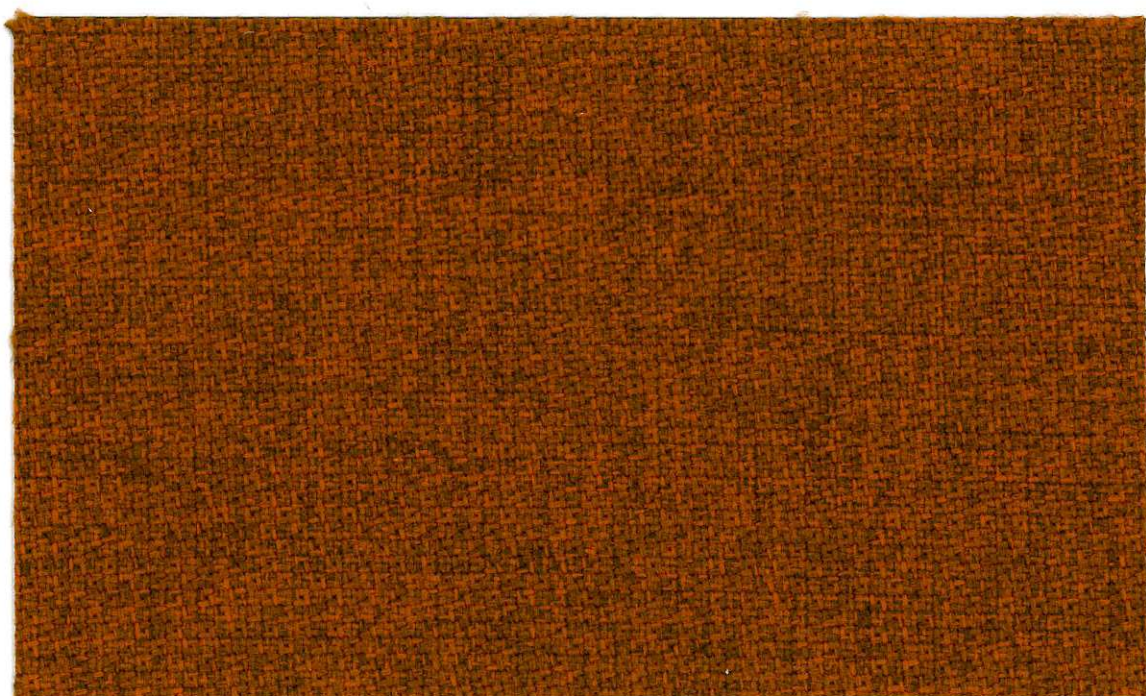

SM02



SM04



SM07



SM09



SM13



SM14




SM16



SM17



SM18



SM19

STEP MELANGE

IT

Composizione

100% Trevira CS

Peso

470 g/lm — 15.16 oz/lin.yd

Altezza

140 cm — 55 inches

PERFORMANCE

Abrasione

100,000 — cicli martindale (EN ISO 12947-2)

100,000 — cicli (ASTM D4157)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Resistenza alla luce

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Resistenza allo sfregamento

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

INFIAMMABILITÀ

Certificati

DIN 4102 - B1

NF P 92-503/504/505 M1

BS EN 1021 1&2 Sigarette e fiammiferi

BS EN 1021-1 Sigarette

BS 5852 Crib 5

ÖNORM A3800-B1-B3825-Q1 UK

FAR/JAR 25.853 (a) (i) (ii)

AM 18 - NF D 60-013

CA TB 117-2013

Classe Uno UNI 9175 Classe 1 IM

DIN EN 13501-1 B-s1,d0

DIN EN 13501-1 B-s1,d0

IMO MSC 307(88) Annex 1 part 8

IMO MSC 307(88) Annex 1 part 8 UK

MED Certificato IMO

MED Certificato IMO UK

CAN/ ULC-S102.2

CAN/ULC-S109

NFPA 701

US ACT

Pass

ASTM D4157-07 abrasione 100k

ASTM D3511 Pilling

CA TB 117-2013

NFPA 701

AATCC 16 Resistenza alla luce

AATCC 8 or 116 bagnato/umido

EN

Composition

100% Trevira CS

Weight

470 g/lm — 15.16 oz/lin.yd

Width

140 cm — 55 inches

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157)

(heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

FLAMMABILITY

Certificates

DIN 4102 - B1

NF P 92-503/504/505 M1

BS EN 1021 1&2 Cigarette and Match

BS EN 1021-1 Cigarette

BS 5852 Crib 5

ÖNORM A3800-B1-B3825-Q1 UK

FAR/JAR 25.853 (a) (i) (ii)

AM 18 - NF D 60-013-(only for fabric)

CA TB 117-2013

Class Uno UNI 9175 Class 1 I EMME

DIN EN 13501-1 B-s1,d0

DIN EN 13501-1 B-s1,d0

IMO MSC 307(88) Annex 1 part 8

IMO MSC 307(88) Annex 1 part 8 UK

MED Certificate IMO

MED Certificate IMO UK

CAN/ ULC-S102.2

CAN/ULC-S109

NFPA 701

US ACT

Pass

ASTM D4157-07 Wyz abrasion (heavy duty) 100k

ASTM D3511 Pilling

CA TB 117-2013

NFPA 701

AATCC 16 Light fastness

AATCC 8 or 116 Dry/wet crocking

