



TESSUTO/UPHOLSTERY
CRISP

CATEGORIA K
CATEGORY K

Gabriel

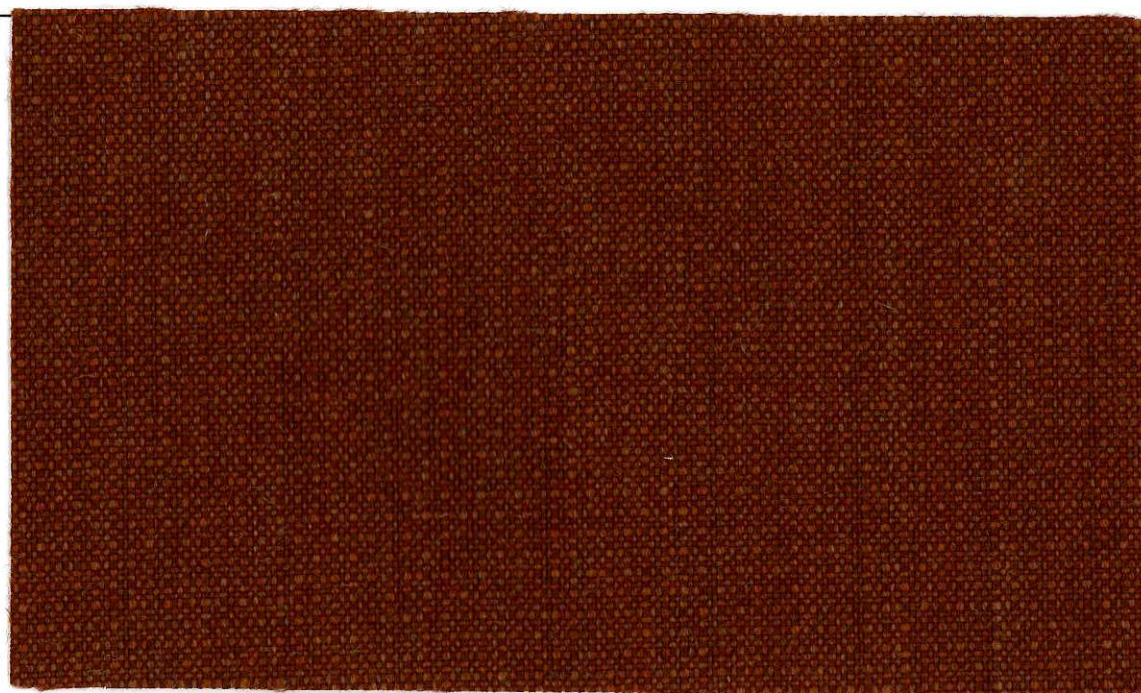


CR01



CR02



CR03



CR04



CR05



CR06



CR07



CR08



CR09



CR10



CR11

CRISP

IT

Composizione

93% Lana Nuova Zelanda, 7% Poliamide

Peso

460 g/lm — 14.84 oz/lin.yd

Altezza

140 cm — 55 inches

PERFORMANCE

Abrasione

200,000 — cicli martindale (EN ISO 12947-2)

200,000 — cicli martindale (ASTM D4966)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Resistenza alla luce

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Resistenza allo sfregamento

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

INFIAMMABILITÀ

Certificazioni

BS 5852 Part 1 0,1

sigarette e fiammiferi

1988 BS 476 Parte 7 classe 2

BS EN 1021 1&2 sigarette e fiammiferi

Classe Uno UNI 9175 Class 1 IM

CA TB 117-2013

IMO MSC 307(88) Annex 1 part 8

MED Certificato IMO

IMO MSC 307(88) Annex 1 part 8 UK

MED Certificato IMO UK

ÖNORM A3800-B2-B3825-Q1 UK

US ACT

Pass

AATCC 8 or 116 bagnato/umido

AATCC 8 or 116 bagnato/umido

ASTM D4966 Cicli Martindale

ASTM D4966 Cicli Martindale

ASTM D4970 Pilling

ASTM D4970 Pilling

AATCC 16 Resistenza alla luce

AATCC 16 Resistenza alla luce

CA TB 117-2013

CA TB 117-2013

EN

Composition

93% New Zealand wool, 7% Polyamide

Weight

460 g/lm — 14.84 oz/lin.yd

Width

140 cm — 55 inches

PERFORMANCE

Abrasion

200,000 — rubs martindale (EN ISO 12947-2)

200,000 — rubs martindale (ASTM D4966)

(heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

FLAMMABILITY

Certificates

BS 5852 Part 1 0,1 Cigarette & Match,

The Furniture and Furnishing Regulations 1988

BS 476 Part 7 class 2

BS EN 1021 1&2 Cigarette and Match

Class Uno UNI 9175 Class 1 I EMME

CA TB 117-2013

IMO MSC 307(88) Annex 1 part 8

MED Certificate IMO

IMO MSC 307(88) Annex 1 part 8 UK

MED Certificate IMO UK

ÖNORM A3800-B2-B3825-Q1 UK

US ACT

Pass

AATCC 8 or 116 Dry/wet crocking

AATCC 8 or 116 Dry/wet crocking

ASTM D4966 Martindale (heavy duty)

ASTM D4966 Martindale (heavy duty)

ASTM D4970 Pilling

ASTM D4970 Pilling

AATCC 16 Light fastness

AATCC 16 Light fastness

CA TB 117-2013

CA TB 117-2013