


TESSUTO/UPHOLSTERY
SAVOY

CATEGORIA M
CATEGORY M

Gabriel

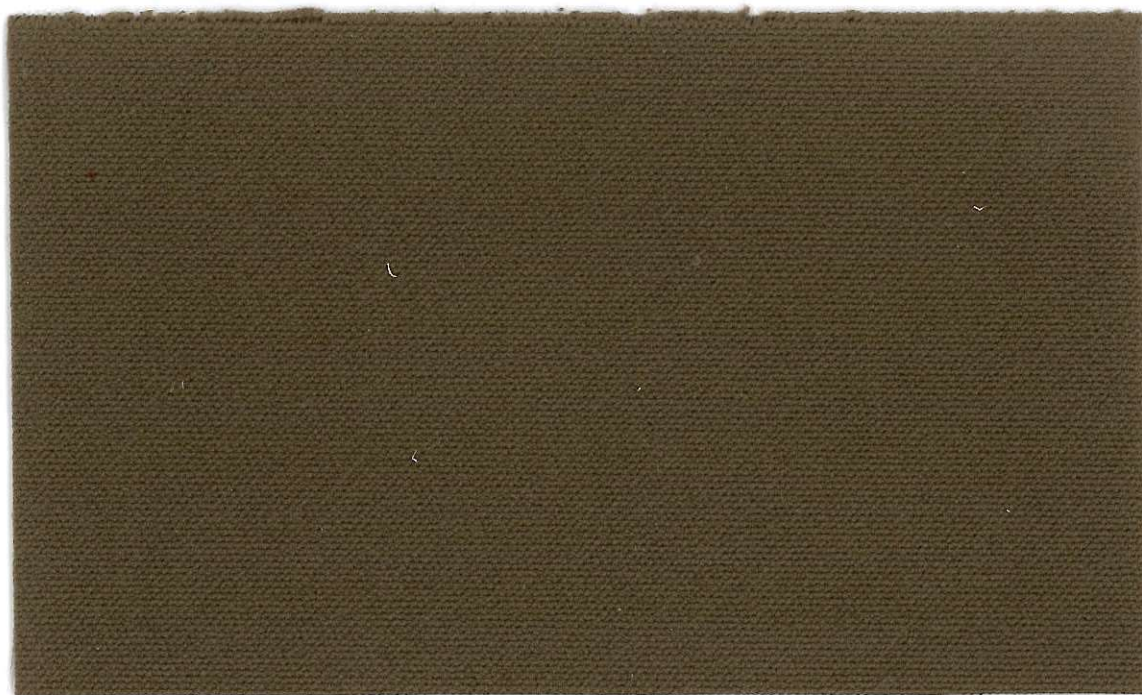

SA07



SA02



SA04



SA05



SA08



SA09



SA10



SA11



SA14

SAVOY

IT

Composizione

100% Trevira CS

Peso

600 g/lm — 19.35 oz/lin.yd

Altezza

140 cm — 55 inches

PERFORMANCE

Abrasione

100,000 — cicli martindale (EN ISO 12947-2)

100,000 — cicli (ASTM D4157)

Pilling

5 — scale 1-5, max. 5 (EN ISO 12945-2)

Resistenza alla luce

5-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Resistenza allo sfregamento

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

INFIAMMABILITÀ

Certificati

BS EN 1021-1 Sigarette

BS EN 1021-2 Fiammiferi

BS 5852 Crib 5

DIN 4102 - B1

NF P 92-503/504/505 M1

AM 18 - NF D 60-013

Classe Uno UNI 9175 Class 1 IM

DIN EN 13501-1 B-s1,d0

CA TB 117-2013

NFPA 701

US ACT

Pass

AATCC 8 or 116 bagnato/umido

CA TB 117-2013

NFPA 701 Abrasione

100k ASTM D3511 Pilling

AATCC 16 Resistenza alla luce

EN

Composition

100% Trevira CS

Weight

600 g/lm — 19.35 oz/lin.yd

Width

140 cm — 55 inches

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157)
(heavy duty upholstery)

Pilling

5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

FLAMMABILITY

Certificates

BS EN 1021-1 Cigarette

BS EN 1021-2 Match

BS 5852 Crib 5

DIN 4102 - B1

NF P 92-503/504/505 M1

AM 18 - NF D 60-013-(only for fabric)

Class Uno UNI 9175 Class 1 I EMME

DIN EN 13501-1 B-s1,d0

CA TB 117-2013

NFPA 701

US ACT

Pass

AATCC 8 or 116 Dry/wet crocking

CA TB 117-2013

NFPA 701

ASTM D4157-07 Wyz abrasion (heavy duty)

100k ASTM D3511 Pilling

AATCC 16 Light fastness

